



Case Sealer LDX-RTB

High Performance - Random Case Sealing

The Little David LDX-RTB is the latest in a series of industrial grade, high performance case sealers from Little David®. This case sealer is designed to seal random assortments of case sizes and is unrivaled in its sheer efficiency, easy-of-maintenance, durability, and versatility.

Little David® delivers high-performance packaging equipment.

Little David® LDX-RTB



Performance and Design Features:


- ▣ **High Performance-** Case Sealer processes cases between 40%-80% faster than the nearest competition-providing the efficiency you require.
- ▣ **Versatile-** Capable of processing void-filled and overstuffed cases at high speeds. Same machine runs 2" and 3" tape plus mirror image setup.
- ▣ **Industrial Design-** Case hardened steel "v" rollers and non-mechanical side rail actuation ensure long-term performance and durability.
- ▣ **Quick/Easy Maintenance-** Easy access motors, electrics, and belts facilitate quick and easy maintenance and repair.


LDX-RTB

The Little David® LDX-RTB is a semi-automatic case sealer designed for processing random assortments of case sizes. The LDX-RTB automatically adjusts for the height and width of the case presented to it by an operator. The adjustments can also be fixed in place to process a series of uniform of cases. Cases are top and bottom sealed with 2" or 3" tape using the latest CaseLocker™ 60 tape cartridges.

Little David® Performance and Design Features:

- Processes cases between 40% and 80% faster than the competition
- Processes void-filled and overstuffed cases
- Safety locking mechanisms for head and side rails in case sudden loss of air or electric occurs.
- Interchangeable cartridges (top and bottom)




 **CaseLocker™ 60:**
This high-performance tape cartridge features positive tape cutting, light actuation for weak boxes, an adjustment free design and is capable of running at speeds up to 200 ft./min.

Distributor Information:



Machine Dimensions:

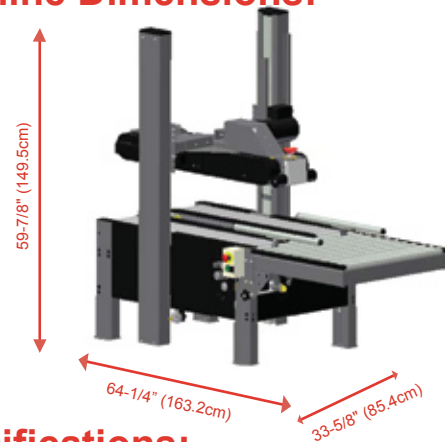

Specifications:

Power Requirements: 110 volts, 60 cycle, single phase

Air Requirements: 9 SCFM @ 85 psi

Operating Speed: Continuous belt drive; Standard: 115' per minute (35.05 m/min). High Speed: 155' per minute (47.25 m/min.)

Closure Material: Pressure Sensitive Tape

Weight: 570 lbs. (258 kg.), uncrated

Case Capacity:

Length: 6" - infinite

Width: 5-1/2" - 22"

Height: *3-1/2" - 24.5"

* Minimum height can be reduced to 2.5" with reduced tape tab length

Options of the LDX-RTB:

- Casters
- Flat Exit Pack Table
- Roller Exit Pack Table
- Leg Extensions(3)
- High Speed
- High Mast
- CF-5 Connection Kit

LOVESHAW
an ITW Company

2206 Easton Turnpike
P.O. Box 83
South Canaan, PA 18459
Tel: (800) 572-3434 Fax: (570) 937-3229
www.loveshaw.com

LOVESHAW Europe

A Division of ITW Ltd.

Unit 9 Brunel Gate,
West Portway Industrial Estate
Andover, Hampshire England SP 10 3 SL
Tel: (1264) 357511 Fax: (1264) 355964



©Lovesshaw, an ITW Company, 2009